


ORION



CARPET TILES


ORION

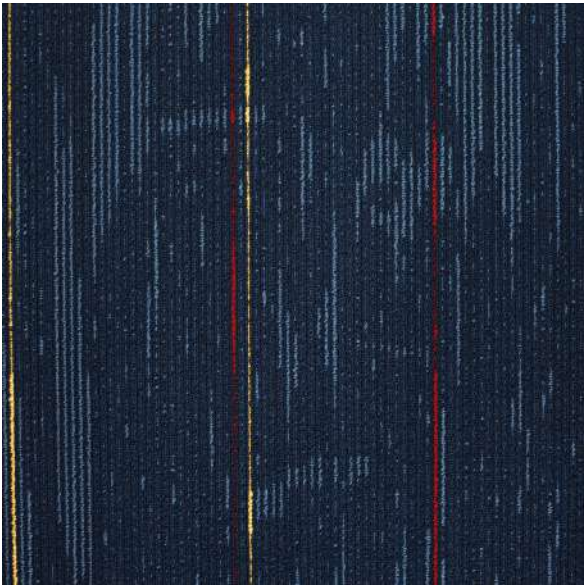

5750 HAZEL



5774 IVY

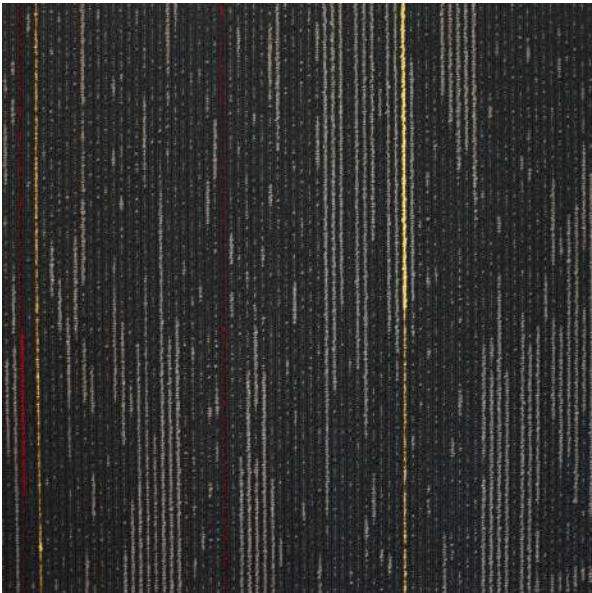

5777 ACACIA



5795 REED

ORION CARPET TILES

SPECIFICATIONS

Style	: ORION
Pile Fiber Composition	: 100% Olefin (Polypropylene)
Yarn Type	: BCF
Dye Method	: Solution Dyed
Construction	: Loop Pile
Backing Structure	: Recova, PU Cushion EcoShield, 100% Recycled Vinyl
Total Thickness	: 7.5 mm
Pile Thickness	: 3.00 mm /4.50 mm
Pile Weight	: 750 g/m ²
Number of Tufts	: 236500 / m ²
Pile Treatment	: INVISTA Anti - Soil treatment, Anti-Microbial (Optional)
Tile Size	: 50 cmx50cm
Package	: 20 pcs per box (5m ²)
Recommended Installation	: Brick or Quarter Turn

PERFORMANCE PARAMETERS

Voc Emmision	ASTM D5116-06	<0.5 mg/m ² /hour
Flammability	ASTM D-2859//FF 1-70//16CFR 1630	Pass 8/8
Reaction To Fire	EN ISO 9239-1:2002	Dfl-s1
Static Propensity	ISO 6356	0.2 kV
Colour Fastness	AATCC/16	5/5 on Grey Scale
Thermal Resistance	ISO 8302	.04m ² K/W
Castor Chair Test	DIN 54324	R ≥ 2.4
Sound Absorption Level	EN ISO 11654	w: 0.15(H)

